



Kidde Inert Gas 469 Series

Fire Extinguishing System

Clean Agent for protection of high value assets.

This is an Inert Gas extinguishing system for industrial (Land-based) applications.

IG55: Container Mix of 50% Nitrogen and 50% Argon

IG541: Container Mix of 52% Nitrogen and 40% Argon

IG100: Container Mix of 50% Nitrogen and 50% Argon

IG01: Container Mix of 50% Nitrogen and 50% Argon

CLEAN

Containing gases that already exist within the atmosphere that we breathe, which mainly includes Argon and Nitrogen and does not contribute to global warming.

FIRE EXTINGUISHING

The extinguishing method is to reduce the normal atmospheric oxygen level of 20.9% down to a level where combustion can no longer be sustained, which for most flammable materials is below 15%

CONTAINERS

Container sizes from 15.9, 67.5, 80 and 140 litres, the latter providing a reduction in container quantity thus substantial cost saving for large projects. Each container is manufactured from high strength alloy steel and the assembly is TPED approved.



COST-EFFECTIVE

By using its tried and trusted range of 150, 200 and 300 bar equipment, Kidde Fire Protection can offer a cost-effective fire extinguishing system

EFFICIENT

Small and large-scale tests have proven that fire is extinguished quickly, before any serious damage can occur. This is achieved by reaching the minimum design concentration within the maximum two minute discharge period for Class A fires and 60 one minute for Class B fires.

SYSTEM DESIGN

The range of containers, valves and related components has been specially selected for use with Inert Gases and has been subjected to stringent testing procedures. Flexibility, quality and reliability make the Kidde Fire Protection range one of the world's finest in fire protection.

Kidde Fire Protection engineered systems are designed using VdS verified software and guidelines, that offer optimum designs for the defined risks with reduced pipe sizes, unbalanced flows and common room and void protection possible.



VALVES

Valves are designed for optimum system performance. A pressure monitoring (glycerene filled) gauge is provided for anti-vibration and easy reading during maintenance. Valves are actuated by electric solenoid, pneumatic, or local manual release.

NOZZLES

Custom-designed nozzles are available with normal pipe sizes from 1/2" mm to 1 1/2", including sidewall, upright and pendant configurations. In addition, silencers can be used with these nozzles to reduce decibel level during discharge within Data Halls.



Typical applications protected by a 469 Inert Gas Clean Agent System:


- Data Centers
- Hospitals.
- Telecommunication Facilities
- Museums & Cultural Heritage Buildings
- Libraries & Archives.

Integrated with 469 Inert gas Clean Agent System components:

- Containers
- Electrical release
- Manual Release
- Pneumatic Release

Approvals & Listings:

- LPCB
- VdS
- TPED
- CPR

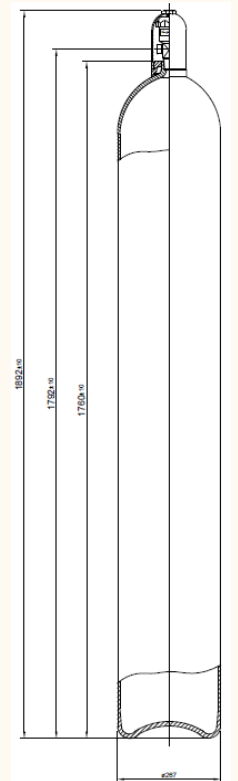

1st Floor, Stokenchurch House
Oxford Road, Stokenchurch,
HP14 3SX
© 2023 Carrier | All rights reserved.