

Model KN-COP-DP-10YL-AQ-WF



Features & Benefits

- **Power Outage Backup:** Powered by 120V AC with a sealed, long-life lithium battery backup that lasts for 10 years.*
- **Double the Detection:** Alerts you to both smoke and carbon monoxide with one device.
- **Remote Notifications and Status:** The Kidde app allows you to receive mobile notifications, like detection of smoke or CO, and lets you check the status of your alarm from anywhere, anytime.
- **Smart Hush® and Test:** Use the Kidde app to silence false alarms or test the alarm from your mobile phone. This feature is only available on the Wi-Fi alarm. Mobile app and alarm must be connected to the same Wi-Fi network.
- **Simple Installation and Setup:** Scan QR code on the Quick Start Guide to access easy-to-follow in-app instructions.
- **Smart Device Connectivity:** Compatible with Google Assistant, Amazon Alexa, Android, and iPhone.**
- **Voice Alert:** Announces "Fire!" when smoke or fire hazard is present, "Warning! Carbon Monoxide!" when CO is detected, "Replace Alarm" for low battery, and "Replace alarm, press button to temporarily silence" at end of unit life.

Wi-Fi enabled:

Receive notifications 24/7 using the Kidde app

Simple Setup:

Easily add alarms by scanning the QR code.


2-in-1 Carbon Monoxide Alarm and Indoor Air Quality:

Provides alerts for CO gas and VOCs

Description

The Kidde Smoke + Carbon Monoxide Alarm with smart features gives you the capabilities you need to manage your home safety systems with confidence. Wi-Fi connectivity and integration with the Kidde app place real-time information on potential issues and alarm status at your fingertips. The app provides a smart, simple way to keep you in control and enhance protection for your home – even when you're not there. The alarm is also designed to work together with existing Kidde hardwire interconnected alarms. When an alarm in any room goes off – even if it's not your alarm with smart features – all alarms will sound and send a mobile notification. It's a new level of control – and it's all from a trusted leader in fire safety for more than 100 years.

Glowing LED Status Ring allows easy identification of current state of alarm.

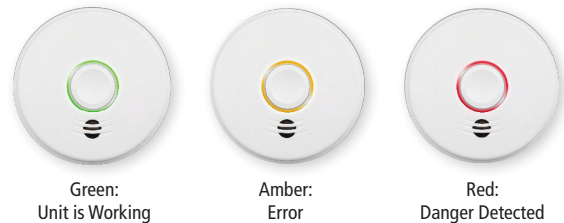

⚠ WARNING: Mobile alert services are ancillary to the product and for informational purposes only. They are not intended or suitable for life safety or critical purposes nor do these services take the place of third-party life safety monitoring services. This product's smartphone and tablet notifications require a stable Wi-Fi connection, and are only as reliable as your home Wi-Fi network.

Images are representative only. Actual product may vary slightly.



*10-year limited warranty on alarm. Not a battery performance claim.

** AMAZON and ALEXA are trademarks of Amazon Technologies, Inc. or its affiliates. Google and Google Assistant are trademarks of Google LLC.



Architectual and Engineering Specs

See User Guide for complete instructions.

AC/DC Hardwire Specifications	
Installation	Fits most standard electrical box openings.
Electrical Connection	Plug-in connector
Interconnect	Up to 24 Kidde devices (limited by NFPA 72, see user guide).***
Sounds and Warnings	
Smoke Alarm	3 long beeps, voice "Fire," 3 long beeps
CO Alarm	4 fast beeps, voice "Warning Carbon Monoxide," 4 fast beeps
End of Unit Life	After 10 years of operation, chirps and voice "Replace alarm, press button to temporarily silence"
CO Alarm Response Times	70ppm: 60-240min 150ppm: 10-50min 400ppm: 4-15min
Technical Specifications	
Power Source	120VAC 60Hz, 53mA max 3V sealed lithium battery backup
Sensor(s)	Smoke: Photoelectric CO: Electrochemical
Audio Alarm	85dB at 10ft
Temperature Range	40°F (4.4°C) to 100°F (37.8°C)
Humidity Range	10 to 95% relative humidity (RH), non-condensing
Wi-Fi	802.11b/g/n (2.4GHz) Wi-Fi (Wi-Fi features only work with AC power connected.)
Weight	0.60lb
Regulatory Agency Compliance (at date of manufacture)	UL 217 UL 2034 NFPA 72 NFPA 101 (One and two family dwellings) Federal Housing Authority (FHA) Housing and Urban Development (HUD)

*** This alarm is not designed to be interconnected with other manufacturer's products, unless otherwise specified.


Important Information

Industry experts recommend specific locations for smoke alarms, such as every level and sleeping area of the dwelling. Industry experts also recommend a CO alarm be installed on each level of the home—ideally on any level with fuel burning appliances and outside of sleeping areas. See user guide for more location information.

Leading authorities recommend that both ionization and photoelectric smoke alarms be installed to help ensure optimal detection of the various types of fires that can occur within the home. Ionization sensing alarms may detect invisible fire particles (associated with fast flaming fires) sooner than photoelectric alarms. Photoelectric sensing alarms may detect visible fire particles (associated with slow smoldering fires) sooner than ionization alarms.

⚠ WARNING: This product is intended for use in indoor residential locations. It is not designed to measure compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards. This device is designed to protect individuals from acute effects of Carbon Monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt, consult a medical practitioner. Individuals with medical problems may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm.

Installation

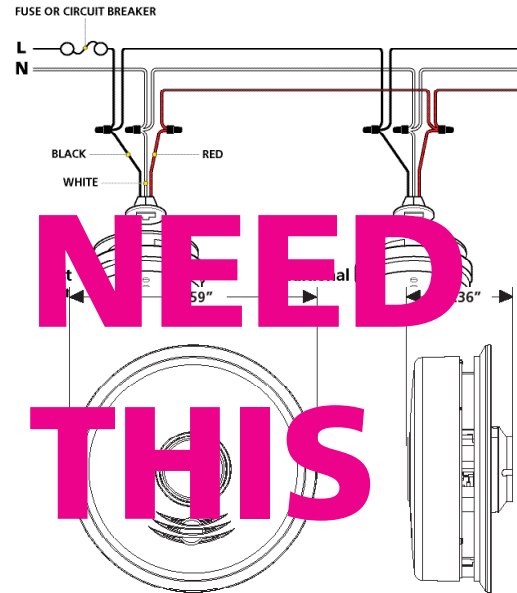

NEED THIS

Ordering Information (Not for sale by individual unit)

UPC	Ordering No:	1 2 of 5	Packaging	Master Pack Qty	Dimensions (w" x d" x h")	Weight
047871310425	21031042	10047871310422	Box	2	9.06" x 7.88" x 8.06"	4 lbs



1016 Corporate Park Drive
Mebane NC 27302
1-877-542-5471
www.Kidde.com



A Carrier Company
©2021 Carrier. All Rights Reserved.

Distributed by: